


# iMist2 Setup Guide – Part 1

If retrofitting iMist2-ready remote hardware, see [mistaway.com/25550](http://mistaway.com/25550) for instructions.


## Connect Gateway to Internet

- Locate the modem or router that provides an internet connection to customer's property.
- Thread antenna (yellow stripes) onto coax connector on gateway.
- Connect gateway to router with Ethernet cable.
- Connect gateway to power with adapter. Orient connector as shown (ridges on top) and gently push the connector into power port.
- Indications: Red – Power, Blue – Internet on, Green – connection with iMist.
- All three lights will come on. After 3 secs, green and blue lights will go off. In about two minutes, after gateway completes bootup and downloads any firmware updates, green and blue lights should come on and stay on.

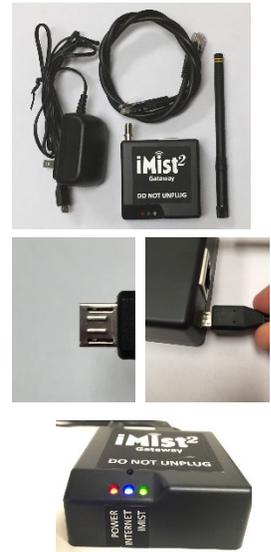


## Add Customer and Associate Gateway


### Add Customer from App



Select Customers




Add New Customer




- Full – website and dealer app
- Mobile - customer app only

Input Customer Info




Save Customer


### Associate Gateway with Customer




Select Gateways




Add New Gateway




Confirm Instructions



Enter Customer and Select



Enter MAC and Select



Adding Gateway



If Added, Pair or Return to Gateways




If Unable to Add, confirm gateway lights and try again


# iMist2 Setup Guide – Part 2

## Pair Misting Unit with Gateway (at the misting unit)


Select Gateway to Pair




Select Gateways



Select Customer and Pair



App confirm Gateway Connection. Press Pair Misting Units



Confirm Instructions and press Begin Pairing

## Put Node on Misting Unit into Pairing Mode

- DATA menu, UP arrow, select LGW. Press and hold Green/Arrow button for 3 seconds.
- GWL ON and countdown starts.



Pair Gateway and Node



Pairing countdown



“DONE” indicates successful pair



Name the misting system and respond to prompt




If pair fails, follow these instructions and retry


Sync Data  
Check Connection  
Send Invitation



Wait while data synchs  
3 – 5 minutes



If finished, check connection between gateway and node



Send login invitation to your customer from Customer Manager